

Easy-Click-60 Extraction Arms



www.linkhamson.com

Tel: +44 (0)1494 439786

sales@linkhamson.com

- > Extraction arm for application with less space



Kit 1 WF 32



Order No.	Description
T005 87 627 70	Easy-Click-60 extraction arm with sloped nozzle Ø 60 mm, length 1 m, Ø 32 mm, stop valve
Consists of:	
T005 36 574 99	Stop valve with bench mounting brackets
700-3051-ESD	Extraction hose, flexible, 3 m, Ø 60 mm
T005 36 580 99	Extraction arm Ø 32 mm, 1 m
T005 87 628 34	Sloped Nozzle

- > With funnel nozzle



Kit 1 WF Funnel



Order No.	Description
T005 36 571 99	Easy-Click-60 extraction arm with funnel, width 230 mm, height 100 mm, flexible arm, Ø 60 mm, length 1 m, with stop valve
Consists of:	
T005 36 574 99	Stop valve with bench mounting brackets
700-3051-ESD	Extraction hose, flexible, 3 m, Ø 60 mm
0F10	Extraction arm Ø 60 mm, 1 m
ALFA	Funnel nozzle

- > With sloped nozzle



Kit 1 Sloped Nozzle



Order No.	Description
T005 36 572 99	Easy-Click-60 extraction arm with sloped nozzle, Ø 60 mm, length 1 m, stop valve
Consists of:	
T005 36 574 99	Stop valve with bench mounting brackets
700-3051-ESD	Extraction hose, flexible, 3 m, Ø 60 mm
0F10	Extraction arm Ø 60 mm, 1 m
FT-NL	Sloped nozzle

Easy-Click-60 Extraction Arms




www.linkhamson.com

Tel: +44 (0)1494 439786

sales@linkhamson.com

> 2 joint arm and sloped nozzle

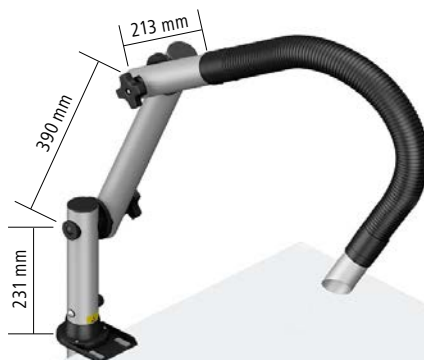

Kit 1S Sloped Nozzle



Order No.	Description
T005 36 579 99	Easy-Click-60 2 joint aluminium extraction arm with sloped nozzle, stop valve, length 1,5 m
Consists of:	
T005 36 598 99	2 joint arms with stop valve and bench mounting brackets
700-3051-ESD	Extraction hose, flexible, 3 m, Ø 60 mm
OFO7	Flex. extraction arm Ø 60 mm, 0,7 m
FT-NL	Sloped nozzle

> 1 joint arm and funnel nozzle



Kit 1S Funnel Nozzle



Order No.	Description
T005 87 627 63	Easy-Click-60 1 joint aluminium extraction arm with funnel nozzle, stop valve, length 1,14 m
Consists of:	
T005 87 627 47	1 joint arm with stop valve and bench mounting brackets
700-3051-ESD	Extraction hose, flexible, 3 m, Ø 60 mm
OFO7	Flex. extraction arm Ø 60 mm, 0,7 m
ALFA	Funnel nozzle



Extraction Tripod



Order No.	Description
FT91000026	Easy-Click-60 1 joint extraction tripod for volume extraction in higher work area like soldering in switch cabinets. Ready for mounting on Zero Smog 4 V and WFE 2S. Measurements with extraction unit: High 1300 mm, Joint 213 mm (without Zero Smog 4V)

Easy-Click-60 Extraction Arms



www.linkhamson.com

Tel: +44 (0)1494 439786

sales@linkhamson.com

> 1 Joint Arm



1 Joint Extraction Arm



Order No.	Description
T005 87 627 47	Easy-Click-60 1 joint aluminium extraction arm with valve and bench mounting brackets

> 2 Joint Arm



2 Joint Extraction Arm



Order No.	Description
T005 36 598 99	Easy-Click-60 2 joint aluminium extraction arm with valve and bench mounting brackets

> Ball Joint Arm



Ball Joint Extraction Arm



Order No.	Description
FT-3446	Easy-Click-60 ball joint aluminium extraction arm with valve and ball joint bracket

> 1 Joint Double Arm



1 Joint Double Arm



Order No.	Description
FT-4402	Easy-Click-60 1 joint double aluminium extraction arm with valve and bench mounting brackets

Easy-Click-60 Extraction Arms



www.linkhamson.com

Tel: +44 (0)1494 439786

sales@linkhamson.com

> 1 Joint Extension




Extension Rotating Joint



Order No.	Description
FT-3417	Easy-Click-60 extension joint rotating for all Easy-click aluminium extraction arms

> 1 Joint Extension

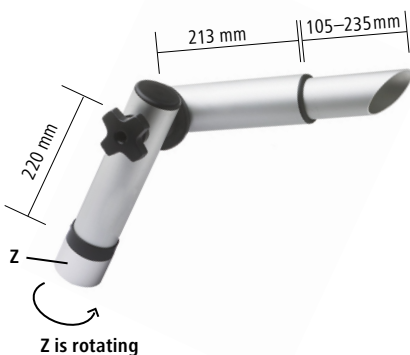

Extension Rotating Joint with P nozzle



Order No.	Description
FT-3475	Easy-Click-60 extension rotating joint with length adjustable sloped 45° P nozzle for all Easy-click aluminium extraction arms

> Wall Mounting Arm



1 Joint Wall Mounting Arm



Order No.	Description
FT-3470	Easy-Click-60 1 joint aluminium extraction arm for wall mounting with valve



WF 32 Extraction Arm



ESD safe

Order No.	Description
T005 36 580 99	ESD microscope extraction arm , flexible, Ø 32 mm, aluminium nozzle sloped 45°, length 1 m



Flexible Extraction Arm, Ø 32 mm



ESD safe

Order No.	Description
3-0F05	Flexible, adjustable arm, Ø 32 mm, length 0,5 m
3-0F07	Flexible, adjustable arm, Ø 32 mm, length 0,7 m
3-0F15	Flexible, adjustable arm, Ø 32 mm, length 1,5 m



Flexible Extraction Arm, Ø 60 mm



ESD safe

Order No.	Description
0F05	Flexible, adjustable arm, length 0,5 m incl. connection (female) in both ends
0F07	Flexible, adjustable arm, length 0,7 m incl. connection (female) in both ends
0F10	Flexible, adjustable arm, length 1,0 m incl. connection (female) in both ends
0F15	Flexible, adjustable arm, length 1,5 m incl. connection (female) in both ends
0F20	Flexible, adjustable arm, length 2,0 m incl. connection (female) in both ends

Extraction Arm Nozzles



Order No.	Description
ALFA	Easy-Click-60 funnel nozzle* 225 mm x 100 mm
ALFA-T	Easy-Click-60 transparent funnel nozzle* 225 mm x 100 mm











ESD safe

Not ESD safe

Extraction Arm Accessories



Order No.	Description	
FT-N	Easy-Click-60 metal sloped nozzle* Ø 50 mm, length 130 mm	 ESD safe
FT-NL	Easy-Click-60 metal sloped nozzle* Ø 60 mm, length 130 mm	 ESD safe
FT-NS	Easy-Click-60 metal tube nozzle, sloped with grid * Ø 50 mm, length 130 mm	 ESD safe
FT-P	Metal tube nozzle sloped for aluminium arms, length adjustable (105–235 mm), Ø 50 mm	 ESD safe
T005 87 628 34	Metal sloped nozzle 32 for 32 mm flex arms, Ø 31 mm, length 100 mm	 ESD safe
FT-U	Easy-Click-60 nozzle* width 190 mm, length 100 mm	 ESD safe
T005 87 358 45	Metal exhaust hood 200 x 100 mm (7.87 x 3.93 in), recommended for use with hot air soldering operations incl. adapter T005 87 627 53	 ESD safe
Z	Adapter to mount nozzles on aluminium arm with possibility to turn the nozzle	 ESD safe

* to be mounted on an aluminium extraction arm without flexible hose, adapter Z is needed.
See extraction arms accessories.

Accessories



Order No.	Description
700-3026	Cleaning Brush for 60 mm flexible arms



ESD safe



T005 87 627 67	Easy-Click-60 hose connector male, straight for WFE 2S, WFE 4S, ZS 4V, ZS 6V and pre-filter box
----------------	---



ESD safe



T005 87 627 69	Easy-Click-60 hose connector male, angle 90° for WFE 2S, WFE 4S, ZS 4V, ZS 6V and pre-filter box
----------------	--



ESD safe

Extraction hose



ESD safe



Order No.	Description
700-3040-ESD	Easy-Click-60 extraction hose, Ø 60 mm incl. quick connections, length 1 m
700-3041-ESD	Easy-Click-60 extraction hose, Ø 60 mm incl. quick connections, length 2 m
700-3051-ESD	Easy-Click-60 extraction hose, Ø 60 mm incl. quick connections, length 3 m
700-3053-ESD	Easy-Click-60 extraction hose, Ø 60 mm incl. quick connections, length 5 m







Accessories



Order No.	Description
T005 87 627 55	Easy-Click-60 male adapter for hose extension, Ø 60 mm
T005 87 627 72	Easy-Click-60 female adapter
T005 87 627 73	Easy-Click-60 male adapter 90°
T005 87 620 36	Extraction hose 60 m heavy construction, sold by meter (max. length 15 m)
T005 87 627 68	Easy-Click-60 hose connection female 60 mm for flexible hose T005 87 620 36
300-3011	Easy-Click-60 hose connection female 60 mm for flex arms with 2 rivets
T005 87 358 47	Hose connection 50 for WFE 2S, WFE 4S, ZS 4V and ZS 6V. For connection to 50 mm (1.96 in) pipe or extraction hose
T005 87 358 48	Hose connection 50, 90° for WFE 2S, WFE 4S, ZS 4V and ZS 6V. For connection to 50 mm (1.96 in) pipe or extraction hose
T005 87 353 27	Extraction hose 50 Ø 50 mm (1.96 in), for connection to pipe system 50, sold by meter
T005 87 358 79	Hose clamps 50–70 mm (1.96–2.75 in), 2 units, for securing extraction hose 50
T005 87 358 32	Hose connection 75 for WFE 2S, WFE 4S, ZS 4V, ZS 6V e.g. for connection to a stand alone system by means 75 mm (2.95 in) pipe or 75 mm (2.95 in) extraction hose. Plastic, black.
T005 87 358 33	Hose connection 75, 90° for WFE 2S, WFE 4S, ZS 4V, ZS 6V e.g. for connection to a stand alone system by means 75 mm (2.95 in) pipe or 75 mm (2.95 in) extraction hose. Plastic, black.
T005 87 353 13	Extraction hose 75 Ø 75 mm (2.95 in), for connection to pipe system 75. Sold by metre. Plastic, grey/black, flexible.
T005 87 358 31	Hose clamps 70–90 mm (2.75–3.54 in), 2 units, for securing extraction hose 75

Accessories Installation Volume Extraction



Order No.	Description	
T005 87 627 66	Easy-Click-60 T-piece with 2 male connections and 1 female connection	 ESD safe
T005 87 627 74	Easy-Click-60 end cap female, 60 mm, click connection	 ESD safe
T005 87 627 71	Adapter male, Ø 75 mm to Easy-Click-60 female	 ESD safe
FT91000015	Adapter male 75 to male 60	 ESD safe
T005 87 627 50	Adapter 40/60 for Easy-Click-60 extraction arms on 50 mm WFEMP50 power socket	 ESD safe
T005 87 627 53	50/60 Adapter with silicone O-ring to connect Easy-Click 60 mm hoses to WFE 2ES, WFE 2CS, WFE 2S, MP or MG units or 50 mm tubes	 ESD safe

Accessories

Order No.	Description
800-5001	Connection hose aluminium coated Ø 100 mm by meter (max length 6 m/pc)
800-5011-ESD	Connection hose aluminium coated Ø 160 mm by meter (max length 6 m/pc)
800-5002	Reduction 100/63 mm incl. quick connection
800-5004	Reduction 80/63 mm incl. quick connection
800-5012	Reduction 160/100 mm

Volume Extraction Accessories



www.linkhamson.com

Tel: +44 (0)1494 439786

sales@linkhamson.com



Order No.

Description

T005 36 574 99

Easy-Click-60 Stop valve

Table connector for 60 mm (2.36 in) flex arm and extraction tube including air flow valve and 2 bench mounting brackets, male / male



ESD safe



T005 36 575 99

Bench mounting brackets, 2 x

Maximum width of clamp 100 mm (3.93 in),
Ø 100 mm (3.93 in), metal




T005 87 627 46

Easy-Click WFV 60 A Automatic valve

including 2 bench mounting brackets,
WX soldering station controlled automatic valve, male / male



ESD safe

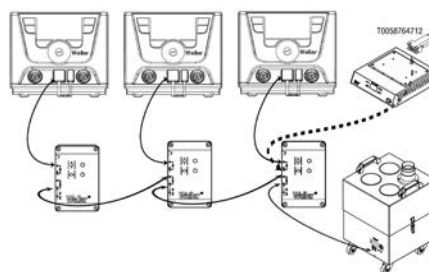

T005 87 627 65

Easy-Click WFV 60 Stop valve

male/female for extraction arms without valve



ESD safe



T005 87 628 08

Replacement butterfly valve plate

for stop valve



ESD safe



FT-W

Replacement butterfly valve

axis rod and handle



780-3001-ESD

Hanging device

for table mounting for fume extraction unit WFE 2X, MG 100, MP 140
including 2 brackets

