

ProBot Advantages

- **Flexible**
- **Affordable**
- **Easy to Use Software**
- **24 Hour Customer Support**


Automatic Profiling

The ultimate output from a reflow oven is an acceptable profile. The reflow oven is essentially a *profile machine*. The ProBot compliments the reflow oven by automatically recording the profile for each and every processed PCB. On the fly, the profile is compared to the established process window to determine whether it is in spec or not. This occurs in the background without human intervention and without interrupting production. The ProBot is programmed by running a manual profile using a KIC profiler.

Flexibility to Add Enhanced Capabilities

Because no one wants to pay for features they don't need, and because no one knows how their needs will develop over time, the ProBot is designed with a very deep list of optional features and capabilities. All of these options can be added to the ProBot from an a la carte options list, either initially or later at any time.

The profiling machine for your profile machine

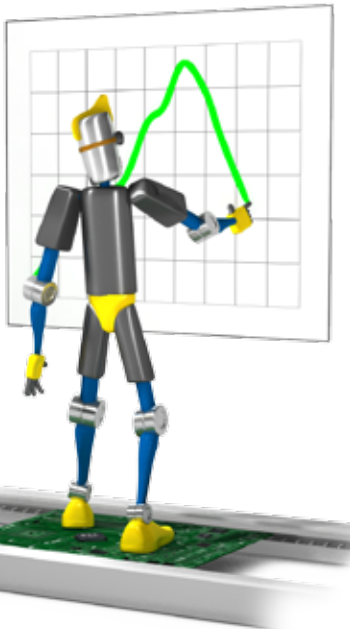

Automatic Profiling

OPTIMIZATION	
Navigator Optimizer	Automated solution for finding the correct recipe to put your process in spec for your product. Navigator gives you choices to customize the process for your factory requirements: highest quality, fastest production or both.
Auto-Focus (includes Navigator)	Eliminates guessing on a new PCB's recipe. Provides suggested recipe for an in-spec profile before running a board. Saves the cost of a PCB.
Navigator Power Optimizer	Navigator software plus an added energy savings optimizer.
Auto-Focus Power (includes Navigator)	Auto-Focus with Navigator software plus an added energy savings optimizer.
TRACEABILITY and CONTROL	
Barcode Reading Traceability	Automatically matches the barcode number with the completed profile data of every single production board recorded by the system.
Barcode Reading Process Control	Eliminate using the wrong recipe. Automatically compares the barcode of a product on the in-feed conveyor to a user defined barcode string for a particular profile recipe.
Barcode Reading - Traceability & Process Control	Package of Traceability and Process Control.
Lot ID	Production run data based on the Lot ID code.
LOCAL & REMOTE VIEWING and TRANSFER	
RPM (Remote Process Monitoring)	The output of profiling data sent to the RPM Server Software at a separate location or externally to a flat file.
RPM Server One (1 seat license)	View profile data from the KIC server at a separate location. One (1) seat license.
RPM Server Five, Ten, Unlimited (5, 10, unlimited seat license)	View profile data from the KIC server at a separate location. Multiple seat licenses.
LDO (Live Data Output)	Output of profiling data sent externally to a flat file.
Live Index Viewing	Screen displays a comprehensive summary of production quality assurance information.
SPC and MAINTENANCE	
SPC/Cpk Charts	SPC/Cpk Charts - Statistical Process Control charts and Cpk calculation.
Troubleshooting	Tab display the probe and conveyor speed deviation to aid in determining potential problem area.



Technical Support
24 Hours Every Day
Everywhere


Risk Free Guarantee

All KIC products are designed to give maximum value and fast payback by streamlining your thermal process. Investment in a KIC product is a step toward total process control and quality management. All KIC products come with a no questions asked, 30 day money back guarantee.

For more information on any of our products or service please visit us on the Web at: www.kicthermal.com or www.kic.cn.

Service Available

- Technical Support
- Installation and Setup
- Application Support
- Hardware Support
- Guaranteed Warranty

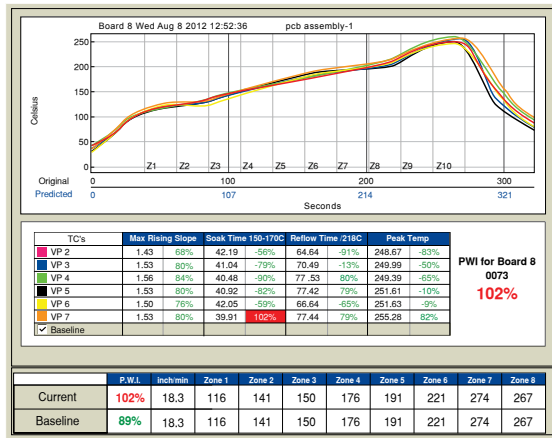

ProBot™ History Profile

System Components

- Two (2) thermocouple probes (each probe has 15 thermocouples)
- 1 ea. data acquisition unit
- 1 ea. speed encoder
- 1 ea. board sensor
- 1 ea. ProBot software with software protection dongle

Optional Hardware Components


- Alarm Relay:** The Alarm Relay connects to the data acquisition unit and allows the system to activate warning lights, audible alarms and/or stop the process infeed conveyor.
- Light Bar:** Used when system goes into 'warning' or 'alarm' state to show change in process and can make audible sound.

Data acquisition unit/Probes

- Accuracy: ± 2°F (1.2°C)
- Readings/second: 13
- Thermocouples:..... Type K
- Temperature Range:.... -150°C to 450°C
- Dimensions:
 - Data acquisition unit (LxWxH):308.6mm x 173.5mm x 35.8mm
 - Probes:length and thermocouple spacing is customized to each oven
- Communications:Ethernet, RJ-45 connector
- Computer Capability:...PC
- Power Requirements: ..12V DC @ 300mA

Note: The ProBot requires a KIC profiler.

THE PROCESS WINDOW INDEX™

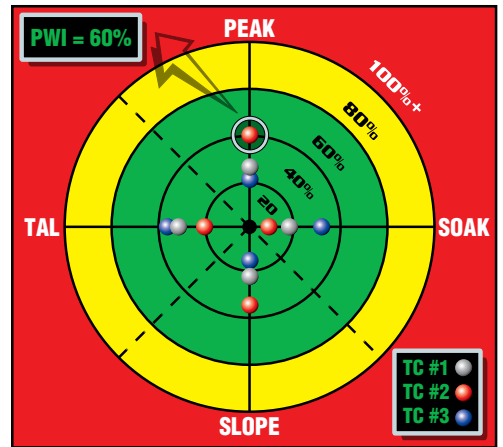

Profiling Reduced to a Single Number

(See the PWI data sheet for a detailed explanation)

COMPUTER CONFIGURATION

Minimum System Requirements

**Note: 2 additional powered USB ports may be needed for optional accessories.



www.linkhamson.com
 Tel: +44 (0)1494 439786
 sales@linkhamson.com